

Mono

320W Bifacial Mono PERC Double Glass Module

JAM60D00 300-320/BP Series

Introduction

These double-glass modules assembled with bifacial PERCIUM cells have the capability of converting lights incident on their rear side into electricity on top of what is being generated by the front side, making them the best-performed and the most cost-effective modules in terms of solar energy generation as well as tolerance for harsh environment and extreme weather conditions.



3%~15% more energy generation



framed design, ease of transportation and installation



Superior low irradiance performance




Excellent temperature dependent performance

Superior Warranty

- 12-year product warranty
- 30-year linear power output warranty

0.5% Annual Degradation Over 30 years

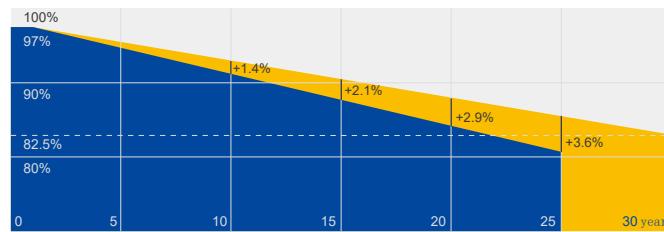


■ Additional Value From 30-Year Warranty ■ JA Standard

Comprehensive Certificates

- IEC 61215, IEC 61730, IEC TS 62804
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



MECHANICAL DIAGRAMS

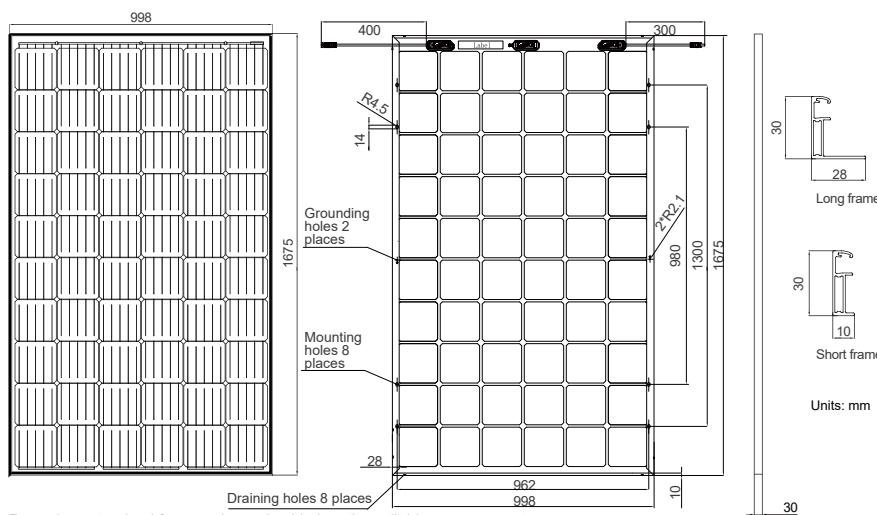

SPECIFICATIONS

Cell	Mono
Weight	25.1kg±3%
Dimensions	1675mm×998mm×30mm
Cable Cross Section Size	4mm ²
No. of cells	60(6x10)
Junction Box	IP68, 3 diodes
Connector	QC 4.10-35
Packaging Configuration	34 Per Pallet

ELECTRICAL PARAMETERS AT STC

TYPE	JAM60D00 -300/BP	JAM60D00 -305/BP	JAM60D00 -310/BP	JAM60D00 -315/BP	JAM60D00 -320/BP
Rated Maximum Power(Pmax) [W]	300	305	310	315	320
Open Circuit Voltage(Voc) [V]	39.98	40.15	40.48	40.75	41.03
Maximum Power Voltage(Vmp) [V]	33.45	33.81	34.16	34.43	34.75
Short Circuit Current(Isc) [A]	9.66	9.76	9.82	9.87	9.93
Maximum Power Current(Imp) [A]	8.97	9.02	9.08	9.15	9.21
Module Efficiency [%]	17.9	18.2	18.5	18.8	19.1
Power Tolerance			0~+5W		
Temperature Coefficient of Isc(α_{Isc})			+0.060%/°C		
Temperature Coefficient of Voc(β_{Voc})			-0.300%/°C		
Temperature Coefficient of Pmax(γ_{Pmax})			-0.380%/°C		
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G				

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

The efficiency of the bifacial PERC glass-glass modules at 200W/m² to that at 1000W/m² is 98%.

*Bifaciality = Pmax,rear/Pmax,front


ELECTRICAL CHARACTERISTICS WITH DIFFERENT REAR SIDE POWER GAIN(REFERENCE TO 310W FRONT)

Backside Power Gain	5%	10%	15%	20%	25%	Maximum System Voltage	1500V DC(IEC)
Rated Max Power(Pmax) [W]	326	341	357	372	388	Operating Temperature	-40°C~+85°C
Open Circuit Voltage(Voc) [V]	40.5	40.5	40.5	40.6	40.6	Maximum Series Fuse	20A
Max Power Voltage(Vmp) [V]	34.16	34.16	34.16	34.26	34.26	Maximum Static Load,Front	5400Pa
Short Circuit Current(Isc) [A]	10.31	10.80	11.29	11.78	12.28	Maximum Static Load,Back	2400Pa
Max Power Current(Imp) [A]	9.53	9.99	10.44	10.90	11.35	NOCT	45±2°C
						Bifaciality*	70%±5%


OPERATING CONDITIONS

CHARACTERISTICS

Current-Voltage Curve JAM60D00-310/BP



Power-Voltage Curve JAM60D00-310/BP



Current-Voltage Curve JAM60D00-310/BP

